

BHMDM/SHMDM SERIES BALL VALVE



Features:


- Spring Return Close use Suffix DMC
- Spring Return Open use Suffix DMO
- All Components of Lever are S.S.
- Stainless Valve Specs See Page MBV62
- Bronze Valve Specs See Page MBV43

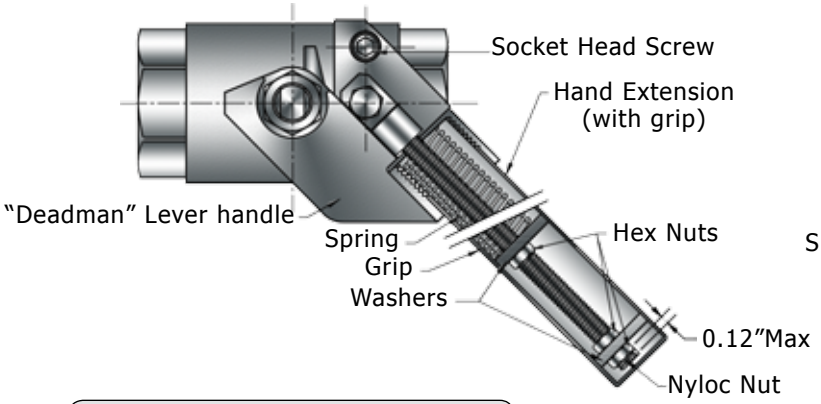

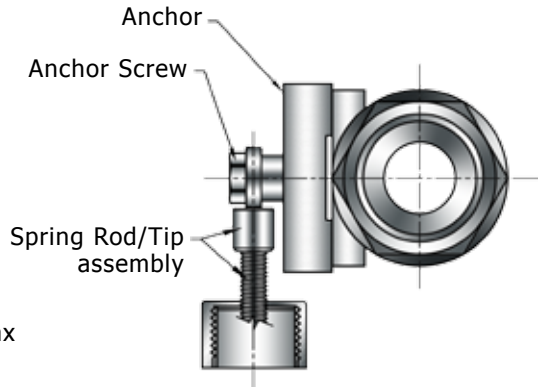

DMO = Dead Man Open
DMC = Dead Man Closed

Note: Dimensions for threading hex nut onto spring rod are approximate, adjust tension to give best on/off service

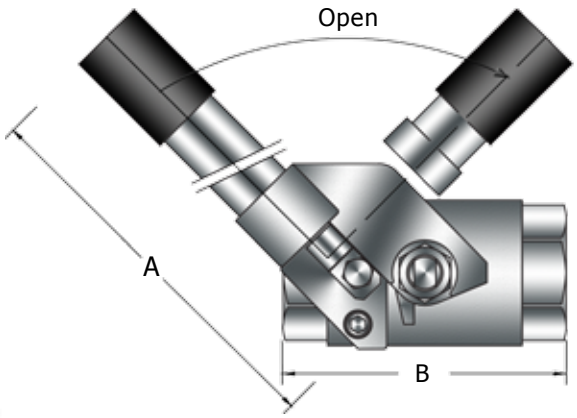

Dimensions

SIZE	A	B
1/4"	7.00	2.25
3/8"	7.00	2.25
1/2"	7.00	2.25
3/4"	7.00	3.00
1"	7.00	3.37
1-1/4"	9.00	4.00
1-1/2"	9.00	4.37
2"	9.00	4.68

Kit Contents

Qty	Description
1	Nyloc Nut
2	Hex Nuts
1	Anchor
1	Anchor Screw
2	Socket Head Screws
2	Washers
1	Grip*
1	Lever Handle
1	Handle Extension
1	Spring
1	Spring Rod/Tip Assembly

* Preassembled to Handle Extension
All Components are made of Stainless Steel