S6M Series Electric Actuated Valves




Features:

Actuator

- VO Self Extinguishing Class Techno-Polymer
- Metal Available on request
- All Actuators IP67 (VB015 IP65)
- Heater Thermostat and Manual Override Standard
- Two Auxiliary Limit Switches Standard
- Battery Backup or 4-20mA Positioner Optional

Valve


- Seal Welded, Full Port Ball Valve
- Available in Stainless Steel and Carbon Steel
- 6000PSI WOG
- Delrin® Seats with Viton® O-Rings
- NACE MR-0175-90
- API 607-4 Fire Safe / API 608 Compliance
- API Standard 6D




*** Actuator Voltage

115V = 115VAC
240V = 240VAC
012D = 12VDC
024D = 24VDC

∗ Option
S = Stainless
C = Carbon

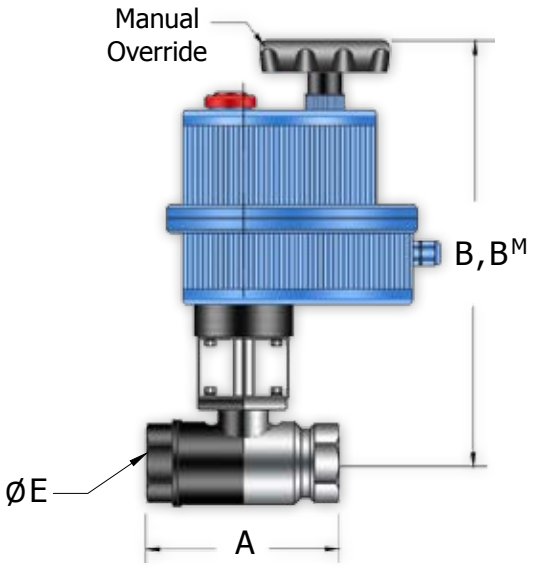

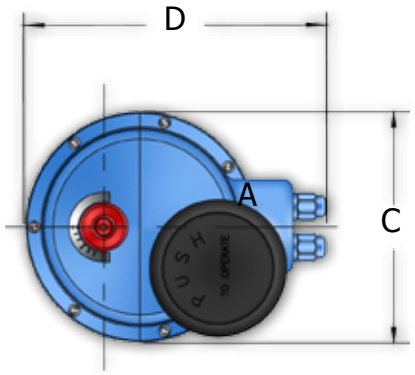

∗ Coupler will be custom fit to valve

Dimensions:

Part No.	Size	Actuator		A	B	C	D	ØE	B^M	Bracket Kit
		Standard	Optional							
E***/*S6M-4	1/2"	VB030	VB030M	3.19	9.95	6.18	7.48	0.49	10.58	BK1/063I
E***/*S6M-6	3/4"	VB060	VB060M	3.78	11.29	7.28	8.43	0.79	11.55	BK1/063B*
E***/*S6M-8	1"	VB110	VB110M	4.25	11.65	8.31	9.33	0.98	12.16	BK2/075C*
E***/*S6M-10	1-1/4"	VB190	VB190M	4.72	12.54	8.31	9.33	1.26	13.05	BK2/075C*
E***/*S6M-12	1-1/2"	VB190	VB190M	5.12	13.42	8.31	9.33	1.50	13.93	BK2/075C*
E***/*S6M-16	2"	VB270	VB270M	5.91	13.47	8.74	10.08	1.50	14.08	BK2/075C*