SSST Series Electric Actuated Tri-Clamp Butterfly Valves



Features:

Actuator

- VO Self Extinguishing Class Techno-Polymer IP-67 Housing, Aluminum Available on request
- -4°F to 131°F Operating Temp.
- Heater Thermostat and Manual Override Standard
- Two Auxiliary Limit Switches Standard
- Shown With 4-20mA Positioner w/Position Indicator


Valve

- 316 Stainless Steel Construction, Surface Finish Meets All 3-A FDA & USDA Standards and Requirements
- Polished Disc Ensures Smooth Flow & Less Buildup
- Silicone Seats Std., EPDM, Viton and White Viton C/F
- 110PSI @ 200°F
- Manual Valve w/ Position Locking Handle Available


*** Actuator Voltage

115V = 115VAC
240V = 240VAC
012D = 12VDC
024D = 24VDC

Crank Wheel
VB110M-VB350M only



B^M = Optional Metal Actuator

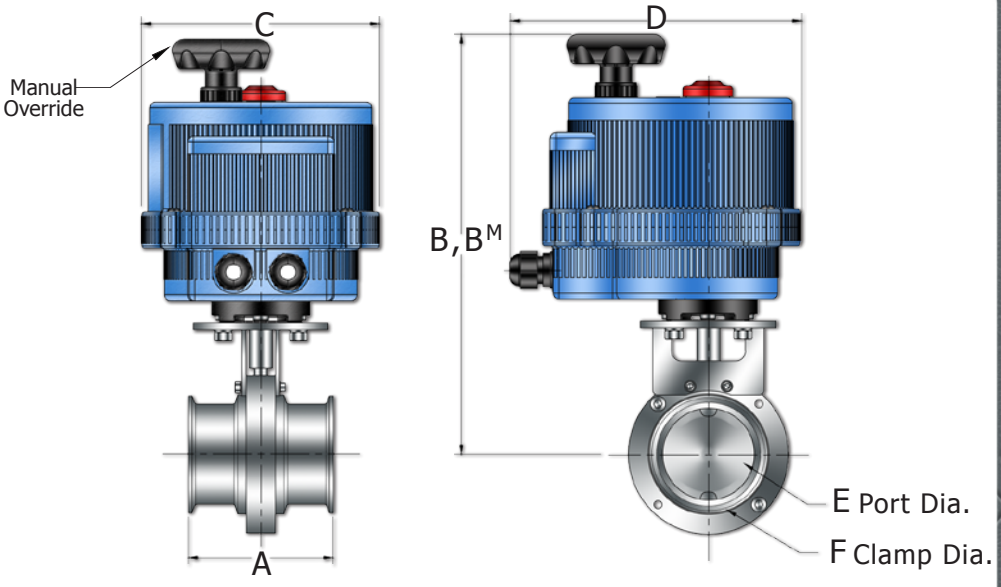

Dimensions:

Part No.	Size	Actuator Std. ABS	Actuator Optional	A	B	B^M	C	D	E
E***/SSST-1	1"	VB030	VB030M	3.50	10.32	10.95	6.18	7.48	0.87
E***/SSST-1.5	1 1/2"	VB030	VB030M	3.50	10.55	11.18	6.18	7.48	1.37
E***/SSST-2	2"	VB030	VB030M	3.75	11.13	11.76	6.18	7.48	1.87
E***/SSST-2.5	2-1/2"	VB030	VB030M	3.81	11.52	12.15	6.61	6.61	2.37
E***/SSST-3	3"	VB030	VB030M	4.06	11.77	12.40	6.18	7.48	2.84
E***/SSST-4	4"	VB060	VB060M	4.78	12.92	13.18	7.28	8.43	3.84
E***/SSST-6	6"	VB110	VB110M	6.00	14.60	15.11	8.31	9.33	5.83