B2S Series Electric Actuated Valves




Features:


Actuator


- VO Self Extinguishing Class Techno-Polymer
- Metal Available on request
- All Actuators IP67 (VB015 IP65)
- Heater Thermostat Standard
- Manual Override Standard
- Two Auxiliary Limit Switches Standard
- Battery Backup or 4-20mA Positioner Optional

Valve

- 2-Way Brass Full Port
- 29 Hg-400 PSI W.O.G. Cold Non-Shock
- -20°F to 344°F



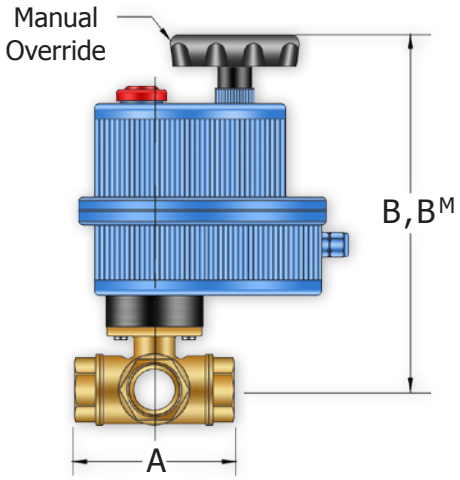

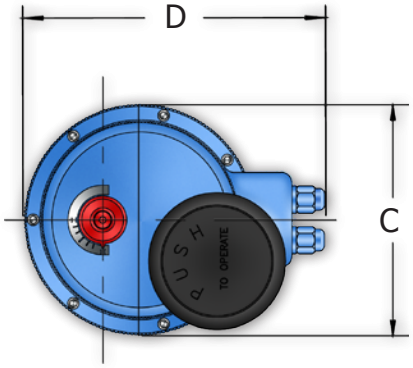

* Option
T = T-Port
L = L-Port

*** Actuator Voltage

115V = 115VAC
240V = 240VAC
012D = 12VDC
024D = 24VDC

Dimensions:

Part No.	Size	Actuator Standard	Actuator Optional	A	B	C	D	B^M
E***/B2S-2T*	1/4"	VB015	VB030M	2.64	6.67	4.84	6.41	8.03
E***/B2S-3T*	3/8"	VB015	VB030M	2.64	6.67	4.84	6.41	8.03
E***/B2S-4T*	1/2"	VB015	VB030M	2.87	6.67	4.84	6.41	8.03
E***/B2S-6T*	3/4"	VB015	VB030M	3.19	6.86	4.84	6.41	8.03
E***/B2S-8T*	1"	VB030	VB030M	3.74	7.38	6.18	7.48	7.64
E***/B2S-10T*	1-1/4"	VB030	VB030M	4.39	7.60	6.18	7.48	7.86
E***/B2S-12T*	1-1/2"	VB030	VB030M	4.86	8.09	6.18	7.48	8.35
E***/B2S-16T*	2"	VB060	VB060M	5.73	11.36	6.94	8.43	11.62
E***/B2S-20T*	2-1/2"	VB060	VB060M	6.93	11.81	6.94	8.43	12.07
E***/B2S-24T*	3"	VB060	VB060M	7.08	11.81	6.94	8.43	12.07

Note: Referance Flow Chart on matrix Page 4