S2F Series Electric Actuated Valves




Features:


Actuator


- VO Self Extinguishing Class Techno-Polymer
- Metal Available on request
- All Actuators IP67 (VB015 IP65)
- Heater Thermostat Standard
- Manual Override Standard
- Two Auxiliary Limit Switches Standard
- Battery Backup or 4-20mA Positioner Optional

Valve

- 316 Stainless Steel Full Port Ball Valve
- ISO 5211 Mounting Pad
- 1000psi WOG – 150psi Steam
- PTFE Seats with Viton® O-Ring Backed Seat
- Temperature 0°F to 366°F



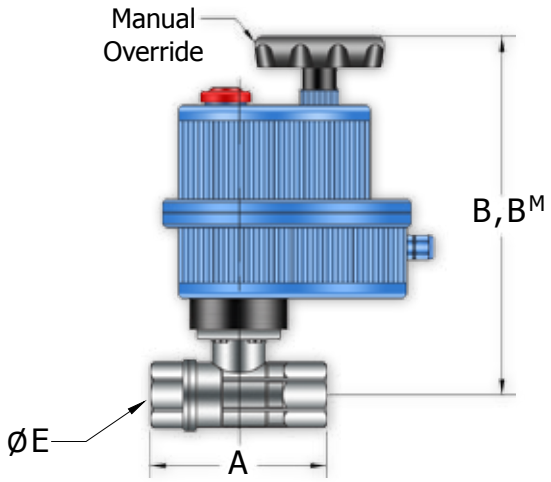

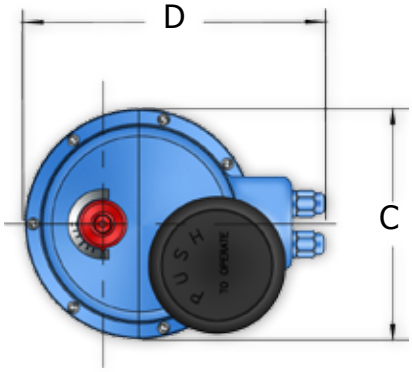

*** Actuator Voltage

115V = 115VAC
240V = 240VAC
012D = 12VDC
024D = 24VDC

B^M = Optional Metal Actuator

Dimensions:

Part No.	Size	Actuator		A	B	C	D	ØE	B^M
		Standard	Optional						
E***/S2F-2	1/4"	VB015	VB030M	2.64	6.85	4.84	6.41	0.39	9.30
E***/S2F-3	3/8"	VB015	VB030M	2.64	6.85	4.84	6.41	0.39	9.30
E***/S2F-4	1/2"	VB015	VB030M	2.64	6.85	4.84	6.41	0.59	9.30
E***/S2F-6	3/4"	VB015	VB030M	3.00	6.93	4.84	6.41	0.78	9.39
E***/S2F-8	1"	VB015	VB030M	3.35	7.36	4.84	6.41	0.98	9.82
E***/S2F-10	1-1/4"	VB015	VB030M	3.66	7.50	4.84	6.41	1.25	9.96
E***/S2F-12	1-1/2"	VB030	VB030M	4.13	9.92	6.18	7.48	1.49	10.55
E***/S2F-16	2"	VB030	VB030M	4.80	10.91	6.18	7.48	1.96	10.91
E***/S2F-20	2-1/2"	VB110	VB110M	6.10	11.52	8.31	9.33	2.55	12.71
E***/S2F-24	3"	VB110	VB110M	6.89	13.24	8.31	9.33	3.15	13.50