

DPG Process Gauges



Features:

- Solid Front Blow-Out Back Safety Case
- Field Liquid Fill-able
- 316 Stainless Steel Internals
- Certificate of Accuracy, NIST Traceable C/F
- Temperature Dry -30°F to 160°F
- Temperature Glycerine Filled 30°F to 160°F

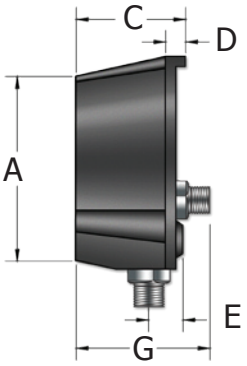

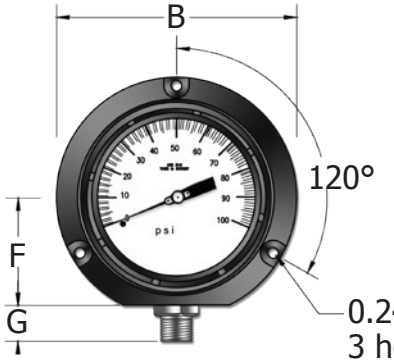

Dimensions

Connection	Face	A	B	C	D	E	F	G	NPT
Back	4-1/2"	5.08	5.84	3.44	1.10	-	2.54	4.27	1/2"
Bottom	4-1/2"	5.07	5.91	3.03	0.91	1.38	2.56	1.38	1/4"

Bill of Materials

No.	Part	Material
1	Internals	Stainless Steel
2	Case	Phenolic Case
3	Lens	Polycarbonate
4	Pointer	Black, Aluminum

