Dry Gauges




Center-Back Mount




Bottom Mount

Features:

- Utility Gauges for Commercial and Industrial Markets
- Black Steel Case with Chrome Bezel
- Copper Alloy Internals
- Available with Stainless Steel Case
- Certificate of Accuracy, NIST Traceable C/F
- Temperature Range -50°F to 160°F

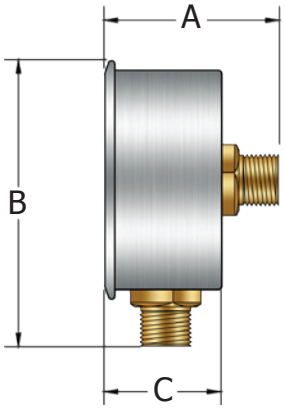


CBM = Center Back Mount
LM = Lower Mount



Dimensions

Face Size	Connection	A (CBM Only)	B (LM Only)	C	D
1″	1/8″ NPT		n/a	.64/16mm (n/a)	.99/25mm (n/a)
1-1/2″	1/8″ NPT	1.54/39mm	2.26/57mm	.93/24mm	1.64/42mm
2″	1/8″ or 1/4″ NPT	1.90/48mm	2.83/72mm	1.03/26mm (1.06/27mm)	2.07/53mm
2-1/2″	1/4″ NPT	1.97/50mm	3.31/84mm	1.17/30mm (1.13/29mm)	2.50/63mm
3-1/2″	1/4″ NPT	2.02/51mm	4.49/114mm	1.22/31mm (1.12/28mm)	3.49/89mm (3.53/90mm)
4-1/2″	1/4″ or 1/2″ NPT	2.18/55mm	5.80/147mm	1.31/33mm (1.12/29mm)	4.50/114mm (4.79/122mm)



Bill of Materials

No.	Part	Material
1	Internals	Copper Alloy
2	Case	Black, Steel
3	Bezel	Chrome Plated Steel
4	Lens	Plastic
5	Pointer	Black, Aluminum