

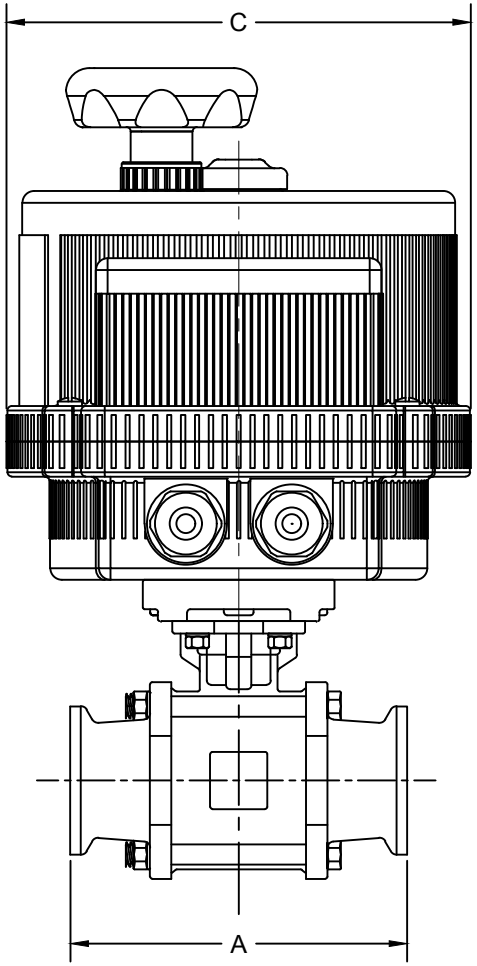


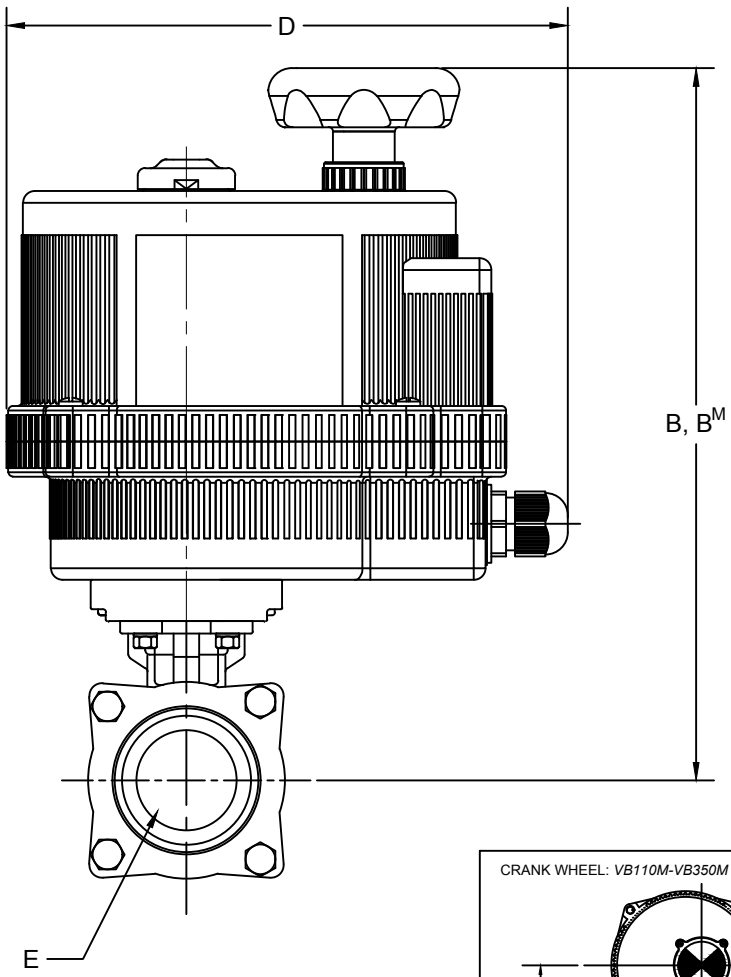



ACTUATOR NOTES:

- *IP67 RATED*
- *2 LIMIT SWITCHES : STD*
- *INTERNAL HEATER: STD*
- *HIGH IMPACT ABS ACTUATORS LISTED AS STANDARD,*
  METAL HOUSING UNITS AVAILABLE UPON REQUEST.
- *-4°F TO 131°F*

VALVE NOTES:

- CF8M STAINLESS STEEL BODY
- 316 STAINLESS BALL AND STEM
- 29" Hg-1000 PSIG WOG COLD NON-SHOCK
- BLOWOUT PROOF STEM
- CAVITY FILLED TEFLON SEATS STD
- (NON CAVITY FILLED AVAILABLE, SEE CATALOG)
- TEMP 0° TO 400° F

ELECTRIC ACTUATED STAINLESS STEEL (STC)

PART #	SIZE	ACTUATOR MODEL		A	B	C	D	E	B^M	Cv
		STANDARD	OPTIONAL							
E***/STC-**4**	1/2"	VB030	VB030M	3.50	9.70	6.18	7.48	0.37	9.70	9
E***/STC-**6**	3/4"	VB030	VB030M	4.00	9.79	6.18	7.48	0.63	9.79	26
E***/STC-**8**	1"	VB030	VB030M	4.50	10.16	6.18	7.48	0.87	10.16	61
E***/STC-**12**	1-1/4"	VB060	VB060M	5.50	11.35	6.94	7.82	1.37	11.61	193
E***/STC-**16**	2"	VB060	VB060M	6.25	11.72	6.94	7.82	1.87	11.98	432
E***/STC-**20**	2-1/2"	VB110	VB110M	7.00	13.35	10.68	9.71	2.37	13.86	728
E***/STC-**24**	3"	VB190	VB190M	9.00	13.91	10.68	9.71	2.88	14.42	1125
E***/STC-**32**	4"	VB190	VB190M	9.50	14.35	10.89	9.71	3.84	14.91	1986

REFER TO CATALOG FOR FURTHER ORDERING INFORMATION

*115V = 115VAC
*240V = 240 VAC
*012D = 12VDC
*024D = 24VDC

B^M = OPTIONAL METAL ACTUATOR

THIS DOCUMENT IS PROPERTY OF UNIVERSAL COMPONENTS, INC. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT IS EXPRESSLY PROHIBITED UNLESS OTHERWISE AGREED UPON IN WRITING. *ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.*

UCI

DRAWING NAME:
ELECTRIC ACTUATED STAINLESS STEEL 2-WAY
FULL-PORT TRI-CLAMP SANITARY 1000 PSI VALVES

MATERIAL:	A	DRAWING NUMBER: E-ACT-STC	REV. 4
SCALE: N.T.S.	NAME: MCH	DATE: 2-16-21	