Glycerin Filled Gauges




Bottom Mount

Center-Back Mount




Features:

- Glycerin Filled for added Durability and Vibration
- Stainless Steel Case and Bezel
- Copper Alloy Internals
- Certificate of Accuracy, NIST Traceable C/F
- Temperature Range 30°F to 160°F

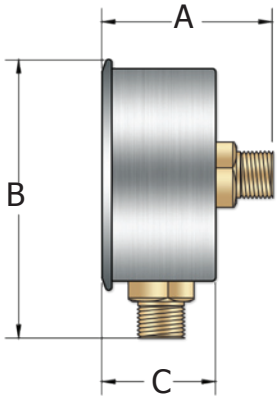

CBM = Center Back Mount
LM = Lower Mount



Dimensions

Face Size	Connection	A (CBM Only)	B (LM Only)	C	D
1-1/2″	1/8″ NPT	1.74/44mm	2.28/58mm	1.02/26mm (1.00/25mm)	1.85/47mm
2″	1/8″ or 1/4″ NPT	2.08/53mm	2.95/75mm	1.18/30mm (1.20/31mm)	2.28/58mm
2-1/2″	1/4″ NPT	2.28/58mm	3.55/90mm	1.34/34mm (1.40/36mm)	2.80/71mm
4″	1/4″ or 1/2″ NPT	3.15/80mm	5.21/132mm	1.16/29mm (1.75/45mm)	4.29/109mm

Bill of Materials

No.	Part	Material
1	Internals	Copper Alloy
2	Case	Stainless Steel
3	Bezel	Stainless Steel
4	Lens	Polycarbonate
5	Pointer	Black, Aluminum

