
Sanitary Tri-Clamp Butterfly Valve




Complies with FDA, USDA and 3A

Materials

- Stainless Steel ASTM 316L Grade
- Surface Finish Meets 3-A, FDA & USDA Standards.
- 316L Mirror Finish Disc Provides an Even Flow Preventing Obstructions and Restrictions.
- EPDM Seats (standard)
- EPDM Resilient Seat (standard)
- FDA Approved Silicone, Viton® and White Viton® Seals are Available.
- Pressure 110psi@200°F
- 13-Position, 304SS, Spring Loaded Lever Lock Handle 1/2" to 6"

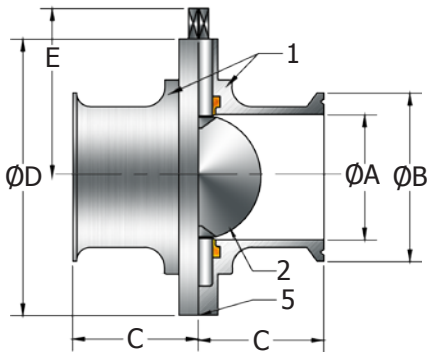

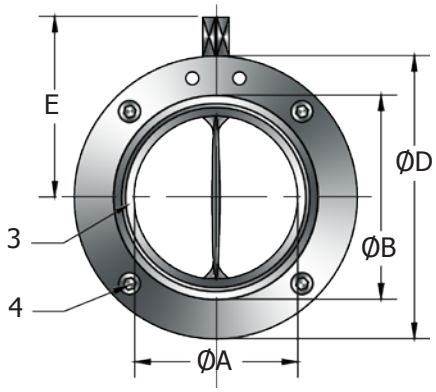

Dimensions

Tri-Clamp (Standard)						
Size	A	B	C	D	E	Torque in/Lbs
1/2"	0.37	1.00	1.75	3.10	2.16	130
3/4"	0.63	1.00	1.75	3.10	2.16	130
1"	0.87	1.99	1.75	3.11	2.40	190
1-1/2"	1.37	1.99	1.75	3.35	2.53	215
2"	1.87	2.52	1.87	4.13	2.93	230
2-1/2"	2.37	3.05	1.91	4.41	3.06	200
3"	2.84	3.58	2.03	4.92	3.32	330
4"	3.84	4.69	2.39	6.18	4.00	470
6"	5.84	6.57	3.00	8.20	6.35	1,230
8"	7.93	8.54	3.28	11.22	7.83	1,300
10"	9.90	10.57	3.28	11.22	8.95	C/F
12"	11.90	12.56	2.87	13.46	9.09	C/F

Materials

No.	Part	Part
1	Body Half	316L Stainless Steel
2	Disc	316L Stainless Steel
3	Seal	Silicone/EPDM/Viton®
4	Body Bolts	304 Stainless Steel
5	Body Cap	Buna-N